


CONNECTING:


Rear of Preamplifier :

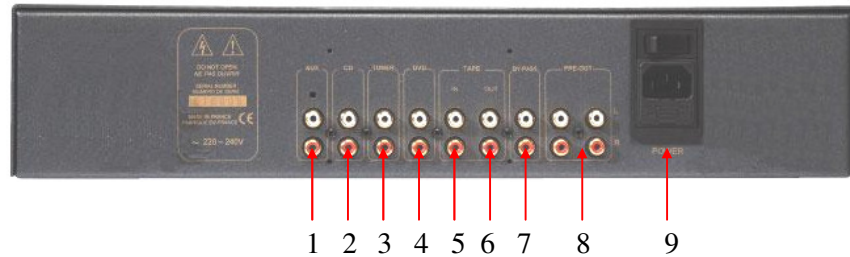

- | | |
|--------------------------|--|
| 1) Aux. Input (or phono) | 8) Outputs (2 pairs) |
| 2) C.D. Input | 9) General switch and power plug (with internal fuse for protection) |
| 3) Tuner Input | |
| 4) DVD Input | |
| 5) TAPE Input (PLAY) | |
| 6) TAPE Output (REC) | |
| 7) BY-PASS Input | |

DETAILS OF FUNCTIONS :

Front view of Preamplifier :

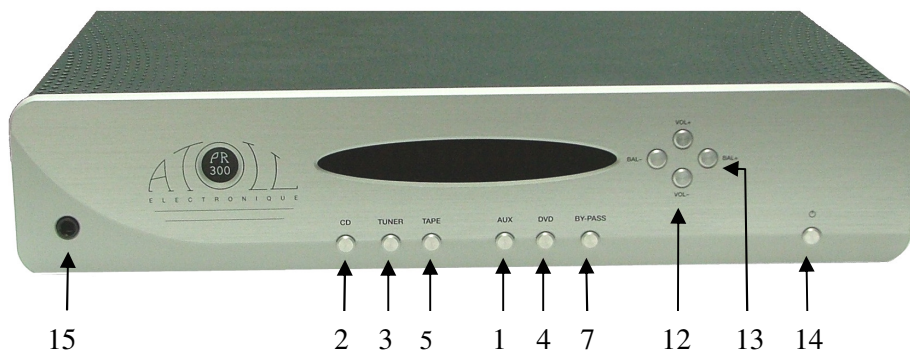

- Knobs 1, 2, 3, 4, 5 and 7 correspond to Outputs direct access.
12) Volume knobs + & -
13) Balance knobs Left & Right.
14) Stand-by.
15) Headphones: *Sound in speakers is cut off when a headphones is plugged.*

ADVISES :

- To optimise the performances of your preamplifier, you should switch it on at least half an hour before any listening, the time for output stage to reach their ideal working temperature. Between two utilisation, it is better to use the stand-by position, so that the output stages remains at their optimal temperatures.
- We advise you to use good wires to link with the other elements (CD player, loudspeakers...). Don't hesitate to take advise from your dealer.
- Your preamplifier is equipped with a temporised switch on. A relay protect loudspeakers on output power stage from over-voltage.

USING THE BY-PASS INPUT :


The By-pass Input offer you the capacity to pass throw your preamplifier so the signal goes directly to the power amplifier with no attenuation. Use it to plug the output of an A/V processor. To avoid any error you can select this mode only via the front panel of preamplifier. Once selected, mention « BY-PASS » appears on display. Then, no other functions are available from front panel or remote Control. Press once more By-pass to get back from By-pass mode.

Careful : Put the volume at the minimum before any use of By-pass Input.

REMOTE CONTROL :

All functions of the remote control are common to those on front panel. The remote control is also able to drive all others ATOLL's products : CD player ; Tuner ; Integrated or preamplifier having this option.

- 16) Mute.
17) Inputs selection + & -.
18) Balance setup (correspond to knobs 13) of front panel : *once inside the Balance menu, setup with keys Vol - and Vol +.*
19) Display on/off.
20) Inputs direct access : Only CD, Tuner, Tape, Aux. and DVD are available for this product.

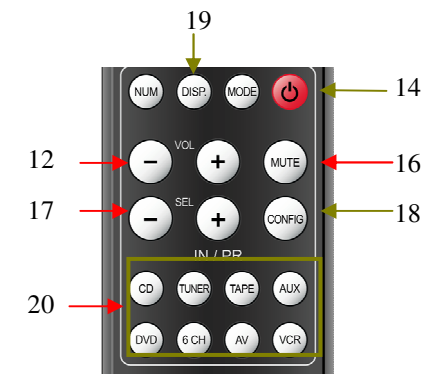

E.C. MARKING :

E.C. marking certified the conformity with low tension directive 73/23/CEE, directive CEM 89/336/CEE and national transpositions.

GUARANTEE :

The guarantee is **two years** long from date of purchase. We recommend you to ask your dealer to fill the guarantee and to conserve it. The guarantee is only available for appliance which have been use correctly.

CLEANING :

Before any cleaning, switch off your preamplifier (10). Use a soft and dry rag to clean up the appliance. Never use acetone, white-spirit, ammoniac, or any kind of product containing abrasive agent. Never try to clean up inside the appliance.

TECHNICAL FACTS	PR300
Alimentation :	330 VA
Total of capacitors :	62 000 μ F
Number of Inputs :	5
Input Impedance :	220 k Ω
Sensitivity :	500 mV
Rate Signal/Noise :	100 dB
Distortion at 1kHz :	0,005%
Frequency Response :	5Hz-200kHz
Rise Time :	1,5 μ s
Dimensions :	440*90*280mm
Weight :	9 Kg

You have just bought a preamplifier with exceptional audiophile performance. We really thank you for your confidence in our products. To get the best part of your preamplifier, please read carefully this manual.

CAUTIONS :

- Put your preamplifier in a dry and well ventilated place, far from source of heat;
- Do not put something on your preamplifier;
- Do not make any plug in when the preamplifier is on;
- Avoid any short-cut;
- Respect switch left & right;

You will find enclosed :

- *a preamplifier ;*
- *a remote control;*
- *one powerlead;*
- *this manual with the certificate of guarantee.*

OWNER'S MANUAL

Preamplifier

PR300



GUARANTEE

To present to your dealer with the invoice when returning back the appliance:

ATOLL ELECTRONIQUE®
Bld des Merisiers
50370 BRECEY
FRANCE

Date of purchase :

Place of purchase :

Buyer signature :

Dealer Stamp

